



FIXED CALIPER

P 32 G 20 .6950 .20



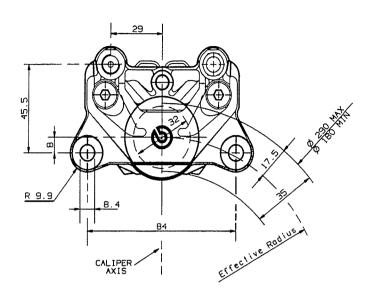


DESCRIPTION

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin. Construction Material: Aluminium Alloy. Operating fluid: brake fluid DOT4.

N.B.: drowing shows caliper Code 20.690.10.
Caliper Code 20.6950.20 specular.

PADS SHAPE AND DIMENSIONS



TECHNICAL CHARACTERISTICS

Pistons number and diameter: 2

32 mm 70 bar Average pad surface (1 pad):

16.1 cm²

MAX working pressure: A) Disc position (TOLERANCE):

±0.5 mm

Weight (with not sintered pads):

0.600 Kg

CONFIGURATION

CODE CHARACT.	PADS FRICTION MATERIAL		MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.6950.10	FERIT I/D 450 FF	BLACK	SX DX	5.0 mm	7.0 cm³

AVAILABLE SPARE PARTS

COOE PARTS CALIPER	PADS	BLEEDER SCREW	DUST COVER	PIN
20.6950.10	107.6949.10	105.3246.21	105.1502.10	120.5116.11

Indicating informations subject to modification. For further specifications contact Technical Section.

LAST UPDATE: 20/09/1996