




FIXED CALIPER

P 34 C
20.6951.50
60 A

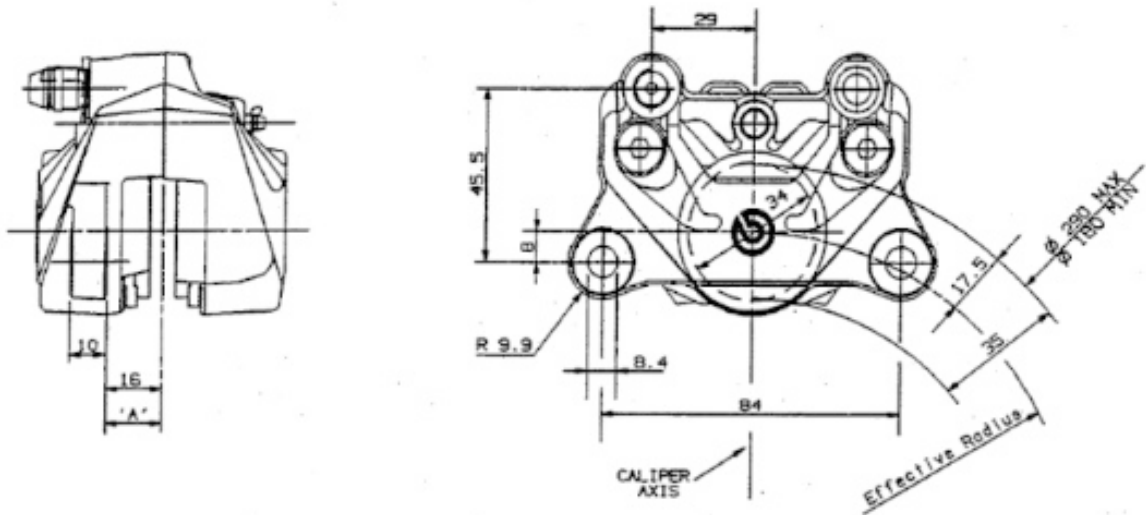


DESCRIPTION

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin. Construction Material: Aluminium Alloy. Operating fluid: brake fluid DOT3+4.

N.B.: drawing shows caliper Code 20.6951.50. Caliper Code 20.6951.60 specular.

PADS SHAPE AND DIMENSIONS

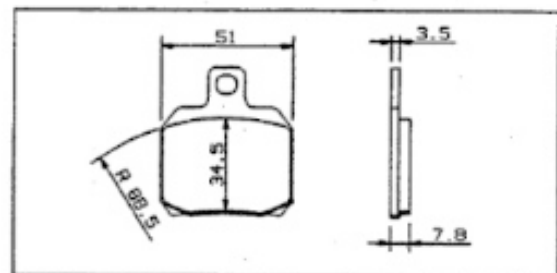

TECHNICAL CHARACTERISTICS

Pistons number and diameter:	2	34mm	Average pad surface (1 pad):	16.1 cm ²
MAX working pressure:		70bar	Weight (with not sintered pads):	0.605 Kg
A) Disc position (TOLERANCE):		±0.5mm		

CONFIGURATION

CHARACT. CODE CALIPER	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.6951.50 60	FERIT I/D 450 FF	GOLD	SX DX	4.0 mm	7.4 cm ³

AVAILABLE SPARE PARTS

SPARE PARTS CODE CALIPER	PADS	BLEEDER SCREW	DUST COVER	PIN SPLIT SPRING
20.6951.50 60	107.6949.11	105.3387.10	105.1502.10	120.5116.11